

AMPAG SPEED

STRAPPING MACHINE

CYKLOP[®]
GLOBAL PACKAGING SOLUTIONS

STRAPPING
WRAPPING
CODING
TAPING

The Ampag Speed is the entry-level strapping machine for intensive use. The machine is suitable for strapping various packages and products such as postal packages, magazines and boxes. The Ampag Speed owes its name to the number of straps it can handle per minute, which is up to 65.

Advantages

- For PP strap: 5, 9, 12 mm
- Electronic welding temperature control
- Simple, safe and user-friendly operation
- Automatic strap loading system and strap end detection
- Mobile, with lockable castors
- Large, stainless steel table surface
- Electronic strap tension control


Options

- Bigger arch size
- Tabletop switch



[< CLICK HERE FOR A VIDEO OF THE AMPAG SPEED >](#)

Technical specifications	
Speed	Up to 65 cycl./min
Strapping material	PP strap 5, 9 and 12 mm
Dimensions (WxHxD)	840 x 1325 x 652 mm
Package size (WxH)	Min. 70 x 20 mm Max. 550 x 400 mm
Package weight	Max. 40 kg
Coil	Core diameter 200 mm Outer diameter 420 mm Width 190 mm
Strap tension	Adjustable strap tension to 450 N
Sealing method	Heat seal
Warm up time	25 seconds
Machine weight	157-166 kg

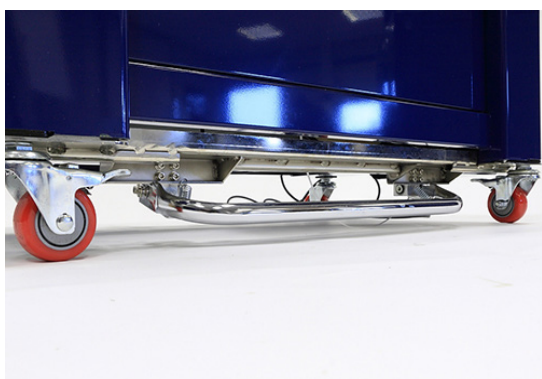

Cyklop International
 Industriestraße 133, D-50996 Köln
 (Rodenkirchen)
 Postfach / P.O. Box 50 12 20,
 D-50972 Köln (Rodenkirchen)

+49 (0) 2236 6020
www.cyklop.com
info@cyklop.com

