

# CM 800 U

Laser marking system

**CYKLOP**<sup>®</sup>  
GLOBAL PACKAGING SOLUTIONS

STRAPPING  
WRAPPING  
CODING  
TAPING

CM 800 U series UV- laser marking system is due to its extremely small focusing spot and minimal processing heat and impact on material especially suitable for ultra-fine marking, special material marking, such as food, tobacco, medicine, electronic components, chemicals, building materials, painted metal surface, glass and many other applications. A laser from the CM 800 series is the first choice for customers with high demands on marking quality.

**Non-stop**

- No consumables in daily operation and no needs of daily mechanical maintenance procedures will effectively extend the up-time
- Air-cooled laser source will maximize machine utilization and reduce unplanned downtime
  - Fully enclosed maintenance-free optical system, no adjustment required to ensure the stability of the entire system

**High efficiency**

- High-speed digital galvanometer system to ensure high speed and accuracy
- Scientific and accurate vector planning logic to reduce marking period
- Ultra-high-speed for up to 150.000 markings per hour

**High Quality**




- "Cold processing" with small focal spot and heat effect, ensures the minimization of package damage
- Fine and non-erasable marking to help on realization of traceability and anti-counterfeiting in the whole product life cycle
- Achievable high-contrast with great visual readability on white HDPE/LDPE packaging

**Easy to operate**

- Flexible integrated solution with multiple standard beam transmission options
- Highly integrated modular design ensures simple for easy installation and maintenance
- Intuitive touch screen interface, simple to learn and easy to edit information

**Technical specifications**

Marking speed	Up to 2,000 characters/second
Line speed	Up to 200/min
Marking windows	70x70 mm to 220x220mm, 110x110 mm standard
Laser power	3, 5 and 10 W
Wave length	355 nm
Marking format	Standard industrial fonts, Bar codes, QR-Code, Data Matrix, Aztec-Code, Han Xin-Code, Graphics, Logos, Symbols, etc.
Focusing aid	Standard, switchable red LED
Positioning aid	Standard
Laser tube	Solid-state UV Laser
User interface	Personalized touch control screen
Communication	UDP, TCP/IP and RS232
Integration	Flexible beam delivery options
Electrical requirement	240 VAC ~50/60 Hz 1 PH 0.70 KW
Environment	Temperature 5-40°C (41-104°F) Humidity 10%-90%, no condensing
Sealing and safety standards	Cabinet: IP54 standard Marking Unit: IP54 standard
Weight	Standard unit: approx. 28 kg

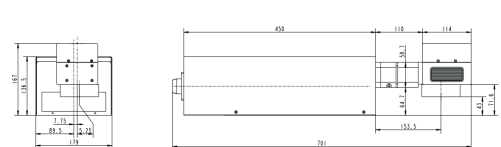

Cyklop International  
 Industriestraße 133, D-50996 Köln  
 (Rodenkirchen)  
 Postfach / P.O. Box 50 12 20, D-50972  
 Köln (Rodenkirchen)

+49 (0) 2236 6020  
 www.cyklop.com  
 info@cyklop.com

